
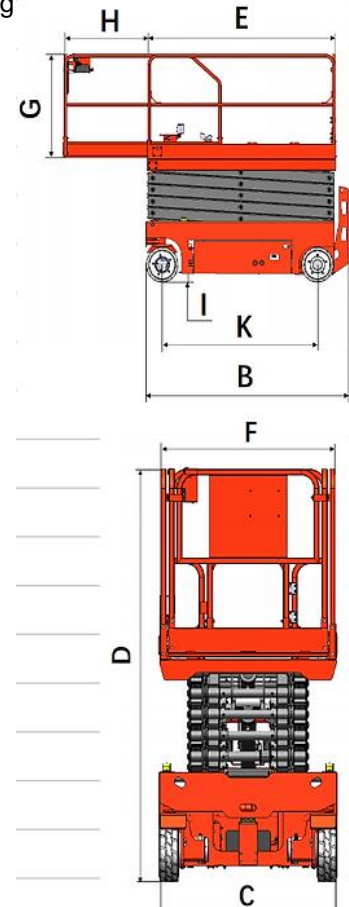


## EKKO ES80E Scissor Lift Aerial Platform

The EKKO ES80E Scissor Aerial Work Platform is a 990-lb capacity compact platform with four wheels and curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 990 lb.
- Raised Height 26.2' (315")
- Lowered Height 90.6"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

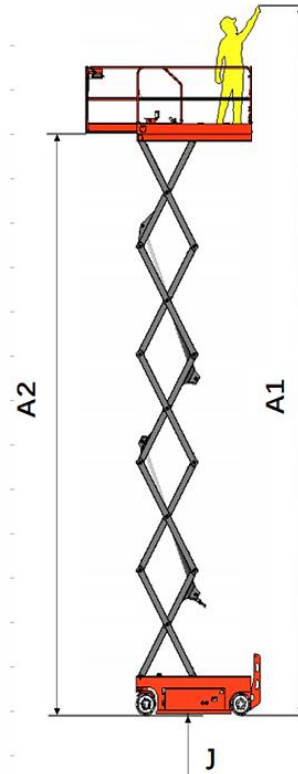

Model		ES80E
Load Capacity	(lb.)	990
Maximum Number of Workers (indoor/outdoor)		2/1
Lifting height Max.	(in)	315" (26.2')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	394" (32.8')
Lowered height	(in)	90.6"(7.5')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(s)	32/35
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	5412

# EKKO

MATERIAL HANDLING EQUIPMENT

**MOVING AHEAD**

## Scissor Lift Aerial Platform

ES40E / ES60E / ES80E / ES100E / ES120E

- Load Capacity 500-990 lbs.
- Raised Height 157.5"(13.1')-468"(39')
- Lowered Height 77"-102.36"
- Steel Construction
- GB25849 and EN280 Compliance
- Max Workers - 2
- Ground Clearance .59"-2.36"
- Steel Construction
- Guardrail Height 43.3"
- Batteries & Charger
- 3 Years limited warranty



## ES40E / ES60E / ES80E / ES100E / ES120E

Compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely.

**WEIGHT CAPACITY:** 500-990 lbs.

**RAISED HEIGHT:** 157.5"(13.1')-468"(39')

**MAX NUMBER OF WORKERS:** 2/1(indoor/outdoor)

**MAX WORKING HEIGHT:** 236.2"(19.7')-547.2"(45.6')

**LOWERED HEIGHT:** 77"-102.36"

**GUARDRAIL HEIGHT:** 43.3"

**PLATFORM EXTENSION SIZE:** 35.43"-39.37"

**GROUND CLEARANCE (CLOSED):** 2.36"-3.74"

**GROUND CLEARANCE (LIFTED):** .59"-.78"

**PLATFORM EXTENSION SIZE:** 35.43"-39.37"

**BATTERY:** 2X12V/100Ah – 4X6V/240Ah

**CHARGER:** 100-240VAC input, 10A-36A output

**BRAKING:** Double rear wheels braking



**DRIVING SPEED(FOLDING STATE):** 0-2.5 MPH

**DRIVING SPEED(LIFTED STATE):** 0-.5 MPH

**RISE/FALL TIME:** 18s/28s – 52s/52s



# SCISSOR LIFT

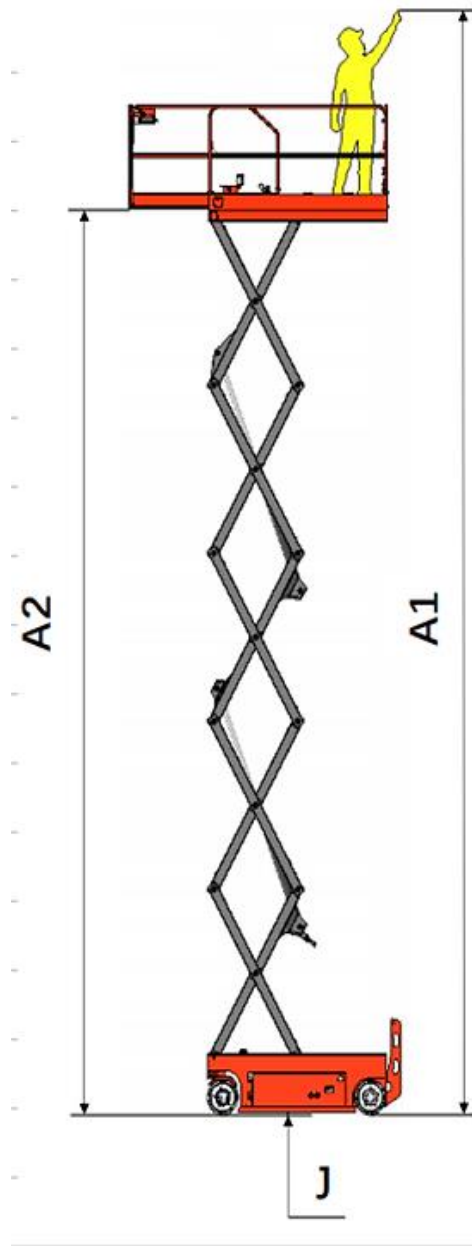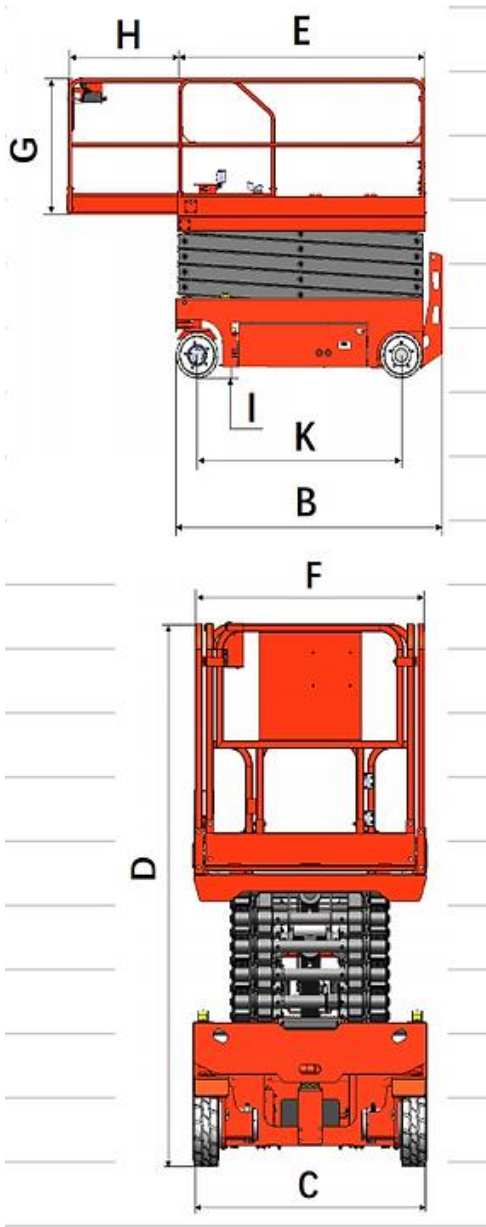

MODEL #	LOWERED HEIGHT	RAISED HEIGHT	PLATFORM SIZE	CAPACITY	SERVICE WEIGHT
ES40E	77"	13.1'(157.5")	50.4"X29.1"	500 lbs.	2050 lbs.
ES60E	86"	19'(228")	65"X30"	500 lbs.	3256 lbs.
ES80E	90.6"	26.25'(315")	89"X45"	990 lbs.	5412 lbs.
ES100E	96.85"	32.8'(394")	89"X45"	700 lbs.	6204 lbs.
ES120E	102.36"	39'(468")	89"X45"	700 lbs.	6490 lbs.



**MOVING AHEAD**

1761 W. Holt Ave.  
 Pomona, CA 91768 USA  
 T: (877) 232-6517 F: (909) 222-6861

**AUTHORIZED DEALERS  
 ONLY**  
[www.ekkolifts.com](http://www.ekkolifts.com)