EA15C Semi-Electric Fork-Over Stacker





Model		EA15C	
Load Capacity	(lb.)	3300	
Lifting height Max.	(in)	119.4	
Load center distance	(in)	24	
Fork length	(in)	45.3	
Single fork width	(in)	5.9	
Overall fork width	(in)	24.5	
Lowered fork height	(in)	2.4	
Fixed leg length	(in)	45.3	
Fixed leg width, single	(in)	5.9	
Width between legs	(in)	23.2	
Turning radius	(in)	53.2	
Overall length	(in)	73	
Overall width max	(in)	59	
Extended mast height	(in)	140.5	
Lowered mast height	(in)	81.8	
Battery Voltage	(V/Ah)	12V/120Ah	
Charger	(V/A)	12V/20A	
Lift Motor	(V/W)	DC 12V/1500W	
Service Weight	(lb.)	870	

The EKKO EA15C Semi-Electric Fork-over Stacker is designed with the combination of the versatility of a forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 119.4" (9.95ft)
- Fork Width between Legs 12.75
- Power Lifting
- Manual Drive
- Internal Charger 12V/20Ah
- Battery 12V/120Ah
- Ergonomic Handle
- Steel Construction
- · Robotic Welding
- 3 Year Limited Warranty







SEMI-ELECTRIC FORK-OVER STACKER EA15C



WALKIE STRADDLE STACKER



EA15C

Superior quality, maneuverable, compact, and durable for all your material handling applications. Ideal for small aisles and areas.

WEIGHT CAPACITY: 3300 lbs. @ 24" load center

LIFT HEIGHT: 119.4" (9.95 ft.)

FORK LENGTH: 45.3", OD 24.5, ID 12.75

BASE LEGS DISTANCE: 24.5

MAST HEIGHT: 81.8"
TURNING RADIUS: 53.2"

INTERNAL BATTERY / CHARGER: 12V 120AH, deep cycle

Battery with internal direct connect 110A 110VAC plug-in automatic 24V/15A charger (both Included)

LIFTING SPEED: 5.35 ips empty; 3.6 ips loaded

LOWERING SPEED: 3.85 ips empty; 4.4 ips loaded

DRIVE WHEELS: 9" x 3" Nylon

LOAD WHEELS: (2) 4" x 3" Nylon per outrigger

HYDRAULICS LIFTING MOTOR: 24V 1500-Watt lifting

Motor.

BRAKES: Foot Brake

OPERATOR CONTROLS: lifting, lowering, battery meter


CHASSIS AND MAST: Robotic Welding; Heavy duty steel chassis with I-beam mast for durability; Telescoping


mast includes a protective steel guard.



Fork-Over Stacker



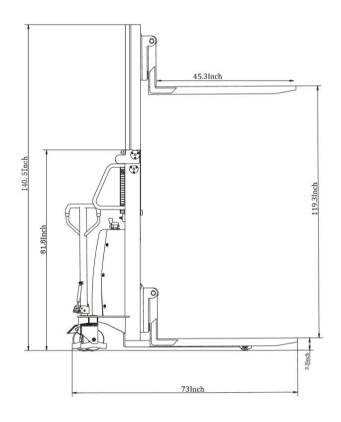

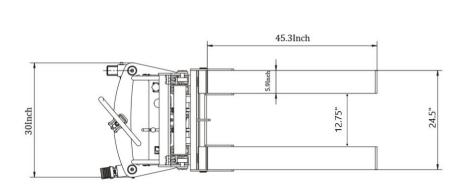

MODEL#	MAST	LIFT HEIGHT	SERVICE WEIGHT
EA15C	81.8	119.4"	870

